




ERW Pipe

High Speed Conveyor Tube
In Accordance to IS-9295
Outer dimension variation
 ± 0.2 mm for $\phi < 133$ mm
 ± 0.3 mm for $\phi > 133$ mm
Wall thickness variation
 $\pm 10\%$ applicable
In line eddy Current tested

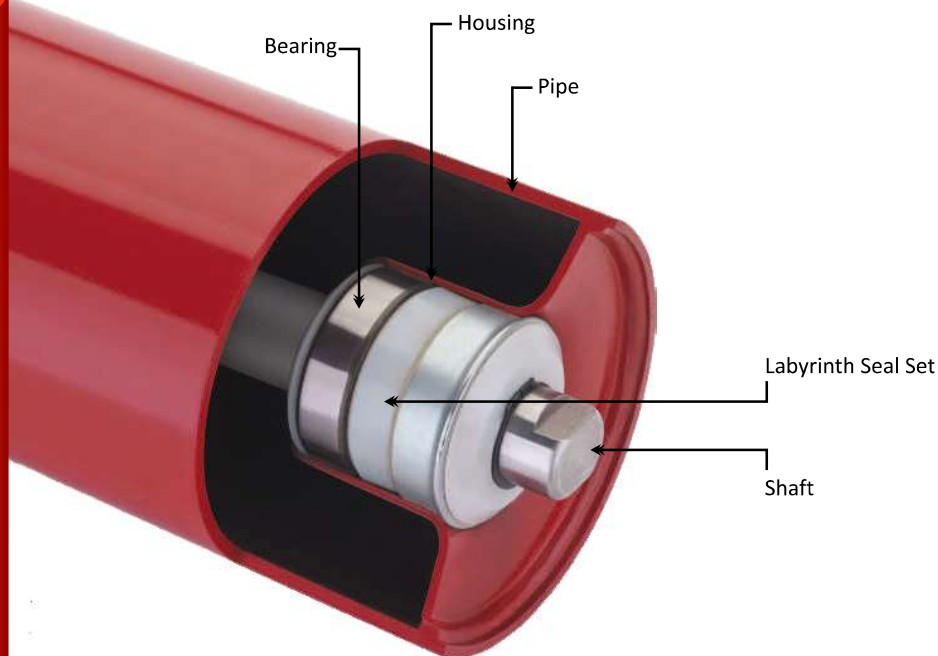

Shaft

Cold Drawn Bright Shaft Bar
Tolerance $\pm 0.0 - 0.03$ mm



Bearing (Ball Bearing)

62xxZZ / RS
63xxZZ / RS



Housing

CNC Treated to ensure both :
- Proper fit of shell ends to bearing housing
- Excellent grip and positioning of bearing inside the bearing housing
- Tolerance $+ 0.00 - 0.027$ mm




Housing & Labyrinth Seal Set

- 1) Sealing Ring (Material: Nylon)
- 2) Female Labyrinth Sealing Ring/inner Seal (Material: Nylon)
- 3) male Labyrinth sealing ring/Outer Seal (Material: Nylon)
- 4) Metal cap/Dust Cap (Material: Steel)
- 5) protective cap/Rain Cap (Material: Nylon)

TubeØ	DØ -0.10
63.5	58.5
76.1	71
88.9	84.5
101.6	97.5
108	103.5
114.3	109.5
127	122.5
139.7	135
152.4	147
159	151
168.3	163

Bearing	-0.03 -0.00 CØ	B ^{+0.10}	EØ ±0.2
6204/ 420204	47	43	27
6205 / 420205	52	44	32
6306	72	45.5	37
6307	80	58	80
6308	40	55.5	47

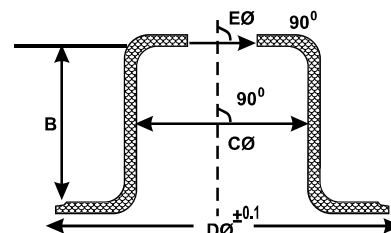



Carrying Roller



Return Rollers



Impact Roller



Rubber Disc Return Roller



Self-cleaning Rollers



Wing Roller



Guide Roller



Guide Roller



Friction Roller



HDPE Roller



Pipe Conveyor Roller



Carrying Idlers



CEMA Idlers



Impact Idlers



Friction Idler



Garland Idlers




Wing Idlers



Return Idler



S.A. Carrying Idler

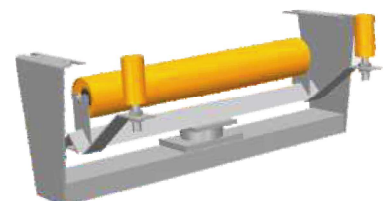

S.A. Return Idler

